

## Solar MCB



Hot Sale China Solar MCB Free Sample Manufacturers and Suppliers.

YL8 solar MCB high breaking miniature circuit breaker has the features of structure advanced, performance reliable, breaking capacity high, appearance elegant and its shell and parts are made of material with impact resistance, strong flame-retardant feature. It is suitable to power system of 50 or 60 frequency,  $U_e$  1500V and below,  $U_i$  63A and below.

It is mainly applied at office building, residence, for lighting, power distribution and overload and short circuit protection of equipment. Normally, it also can be used as the not frequent transfer of power system. It conforms to the standards IEC60898 and GB10963.1.

## Hot Sale China Solar MCB Free Sample Manufacturers and Suppliers

### 1. Application of Hot Sale China Solar MCB

YL8 solar MCB high breaking miniature circuit breaker has the features of structure advanced, performance reliable, breaking capacity high, appearance elegant and its shell and parts are made of material with impact resistance, strong flame-retardant feature.


It is suitable to power system of 50 or 60 frequency,  $U_e$  1500V and below,  $U_i$  63A and below.

It is mainly applied at office building, residence, for lighting, power distribution and overload and short circuit protection of equipment. Normally, it also can be used as the not frequent transfer of power system. It conforms to the standards IEC60898 and GB10963.1.

### 2. Parameters Hot Sale China Solar MCB

YL8 PV Series Circuit Breaker	YL8-63			
Frame degree rated current (A)	63A			
$U_e$ Rated operating voltage (V DC)	DC 500V	DC 800V	DC 1000V	DC 1500V
Rated Current $I_n$ (A)	6-10-16-20-25-32-40-50-63			
Rated insulation voltage $U_i$ (V DC)	2P: 500V 4P: 1000V			
Rated Impact voltage $U_{imp}$ (kV)	4			
Ultimate breaking capacity $I_{cu}$ (kA)	6	6	6	6
Run breaking capacity $I_{cs}$ (% $I_{cu}$ )	75%	75%	75%	75%

Curve type	C
Trip type	Thermal-magnetic
MECHANICAL	20000
	8500
ELECTRIC	1500
	YL5-C40-PV
Shunt release (SHT)	Option
Undervoltage release (UNT)	
Auxiliary contact (AX)	
Alarm contact (AL)	
Wiring capacity (mm <sup>2</sup> )	In≤32A,1~ 25mm <sup>2</sup> ,1≥40A,10~ 35mm <sup>2</sup>
Ambient temperature (°C)	-20~ 70
Altitude	≤2000
Relative humidity	≤95%
Pollution Level	3
Installation category	No obvious shock and vibration
Installation category	Class III
Installation	DIN Standard rail

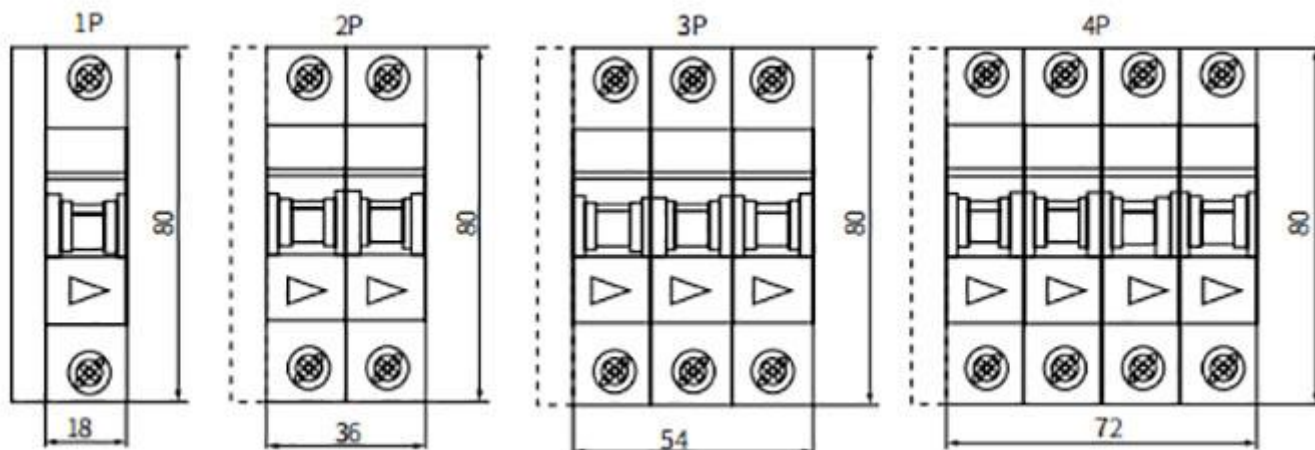

### 3.FAQ of Hot Sale China Solar MCB:

**Q:When I can receive quotation and detail information after send the enquiry?**

A:Reply will be sent in 24hours.



[www.ylongelec.com](http://www.ylongelec.com)

**Q:What's the difference between you and other suppliers?**

A:We have our own design box with PC/ABS material.

**Q:Do you provide samples ? is it free or extra ?**

A:Yes, we could offer the sample for free charge but do not pay the cost of freight.

**Q:Can I get a sample for test before place order?**

A:Of course!

**Q:How's the delivery?Because I really need them is urgently?**

A:Samples cost 2-3 days. Bulk order cost 12-15 days.

**Q:If i want to release order, what's the payment method you accept ?**

A:We accept T/T, Western union, Trade Assurance.